



XP™

Plural Component Sprayers
for Industrial Coatings Applications



PROVEN QUALITY. LEADING TECHNOLOGY.

Industrial Coatings Applications

- ▶ **Discover the benefits of Graco's XP line of sprayers when you switch from hand-mixing to a plural component machine.**



Reduce waste and material costs

With the Graco XP, you reduce waste and save money because you only mix as much material as you need. No more throwing away unused material at the end of the day. No more residue left over in smaller pails or cans. You can buy material in bulk as well.



Less clean-up saves time and money

Only the parts that come in contact with mixed material must be cleaned during the job. Instead of flushing out an entire pump system that contains mixed material, you only need to flush the static mix tube and hose to the gun. Reducing the cleaning time means you save on labor costs and increase uptime.



Provides consistent material quality

No more guesswork or human error in measuring means you can improve throughput, cut back on material waste, and reduce reworking. Materials are proportioned by precision positive displacement pumps and mixed accurately and on-ratio at the mix manifold.



Easy and Affordable

► Easy and affordable two-component spraying

Whether you are spraying a highsolids polyurethane or a marine epoxy, Graco helps you get the job done with a complete line-up of XP Plural-Component Sprayers. To learn more about our XP sprayers or to request a custom solution, visit [graco.com/xp](https://www.graco.com/xp).



Which XP is Right For You?

- ▶ The XP line of sprayers is uniquely set-up to improve the way you spray and mix protective coatings materials.



SERIES	XP			XP-hf	
Model	XP35	XP50	XP70	XP50-hf	XP70-hf
Motor Size (cc)	XL3400	XL6500	XL6500	XL10000	XL10000
Max Fluid Pressure	241 bar (3500 psi)	345 bar (5000 psi)	500 bar (7250 psi)	345 bar (5000 psi)	500 bar (7250 psi)
Flow Rate at 40 cpm <i>(approximate)</i>	7.6 lpm (2 gpm)	11.4 lpm (3 gpm)	7.6 lpm (2 gpm)	15.1 lpm (4 gpm)	11.4 lpm (3 gpm)
Standard Mix Ratios <i>(more ratios available upon request)</i>	1:1, 2:1, 2.5:1, 3:1, 4:1	1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1	1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1	1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1	1:1, 1.5:1, 2:1, 2.5:1, 3:1, 4:1
Demand/Duty Cycle	Medium			High	
Manual*	3A0420			3A4381	

* See operation, repair and/or parts manual for technical specifications including air, hydraulic and electrical requirements for each system.



XPs-hf	
XP50s-hf	XP70s-hf
XL10000	XL10000
345 bar (5000 psi)	500 bar (7250 psi)
15.1 lpm (4 gpm)	11.4 lpm (3 gpm)
1:1, 2:1, 3:1, 4:1	1:1, 2:1, 3:1, 4:1
Highest	
3A6283	

XP-h (hydraulic)	
XP50-h	XP70-h
Viscount II	Viscount II
345 bar (5000 psi)	500 bar (7250 psi)
11.4 lpm (3 gpm)	7.6 lpm (2 gpm)
1:1, 2:1, 2.5:1, 3:1, 4:1	1:1, 2:1, 2.5:1, 3:1, 4:1
High	
3A0420	

* See operation, repair and/or parts manual for technical specifications including air, hydraulic and electrical requirements for each system.

Easy to Operate

► Easy to operate for a much quicker start-up.

With proper training, operators are up and running quickly. The Graco XP runs right out of the box with a fast set-up time.

PressureTrak™

Outlet manifold and valves


- Fluid pressure gauges for monitoring pump output
- Provides automatic overpressure relief
- Includes circulation back to the supply for pump priming, purging, or relieving outlet pressure
- Allows fluid warm-up circulation when optional heaters are used

Mix manifold

- Provides simple fluid control for mixing or flushing
- Accurately dispenses A and B fluids to the static mix tube
- Handles high-solids coatings with large ports and a low pressure drop
- Choose to use mix manifold remotely to reduce solvent and material waste

Xtreme® Pump Lowers

- Standard Severe Duty® coating on rods and cylinder maximizes wear life
- Quick knockdown design and throat seal cartridges provide fast and easy maintenance
- Multiple sizes available to provide various fixed mix ratios
- Easily change one or both lowers to get desired mix ratio

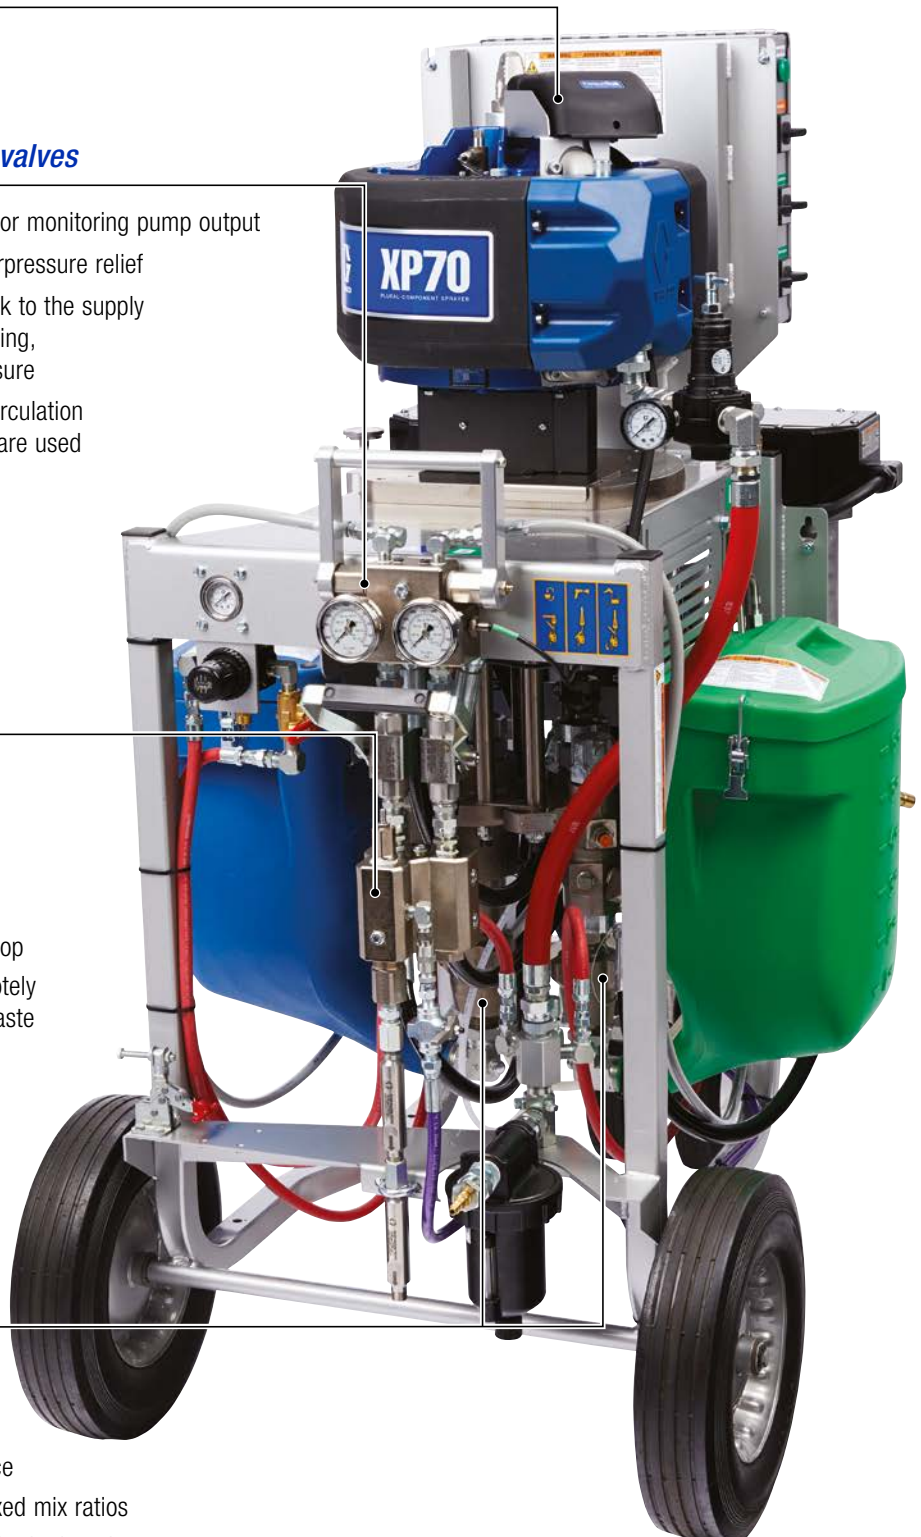

Reduce Maintenance Costs

► Reduce maintenance costs with two pumps instead of three.

Engineered to proportion with two pumps instead of three, the Graco XP reduces your cost of ownership with fewer components.

XL Air Motor

- Simple maintenance
- Reduced icing
- Less pulsation

Electrical Junction Box

- Power distribution to each heat zone
- Two spare zones for flexibility
- Less hassle and a faster setup time

Viscon® HP Primary Heaters

- Reduces coating viscosity and improves spray pattern
- 4000W

Material hoppers

- Side-mounted 26 liter (7-gal) hoppers hold A and B components
- Made of rugged polyethylene - unaffected by harsh solvents
- Optimized for direct pump feed

Heating-Fluid Circulation Kit and Viscon HP Heater

- Efficiently heats Xtreme-Wrap water-heated hose and remote manifold (*heated hose sold separately*)
- Quick disconnects; brass fittings for water lines
- Durable with fast heat up times



More Flow Capacity

► More flow capacity to get jobs done faster.

The Graco XP-hf is designed with more flow capacity making it ideal for high output applications such as railcars, tank linings, marine coatings and much more. This system combines the popular XP Sprayers with the powerful XL™ 10000 air motor, giving you more flow so you can get jobs done faster with less wear and tear.



Increased Productivity

► Increased productivity and labour savings.

With the powerful XL 10000 air motor, get 60% more flow than the XP Sprayers*. This also gives your crew the ability to use larger tips or run multiple guns, getting jobs done faster.

**Running at same cycle rate.*

Exposed Poppets

- Easy access for service and troubleshooting

Manual Shuttle Override Button

- Allows manual changeover of air motor if main valve experiences ice buildup

Simplified Valve Design

- Fewer components for easier service
- Little to no pulsation or pattern fluctuation
- Quiet operation

External Pilot Lines

- Isolates lines from cold valve body
- Eliminates non-restartable icing stalls

De-ice Bleed Air Control

- Maintains performance during heavy icing conditions



Easier to Service

► Easier to service and to understand.

The Xtreme® metering pumps with quick knock-down make it easy to do service work; a built-in fluid filter and the spring loaded lower ball checks for crisp changeover. The mechanically operated design makes it easier to understand.

PressureTrak

- Monitors the A and B differential pressure
- Provides ratio assurance

XL 10000 Air Motor

- The high output, high efficiency 10000 cc air motor lets you use multiple guns with almost no perceivable pulsation

Material Hoppers

- 26 L (7 gal) hoppers hold A and B components until it is time to spray
- Optimized for direct pump feed

3-Wheeled Cart


- Portable cart with tow handle fits through a standard 915 mm (36 in) doorway



Improved Spray Pattern

► Improved spray pattern with film thickness control.

Viscosity control with Viscon HF Fluid Heaters improves spray pattern and film thickness control. Viscon HF heaters (5400W) are 3 times less restrictive than Viscon HP with a removable, cleanable aluminum core – making them ideal for high demand applications.

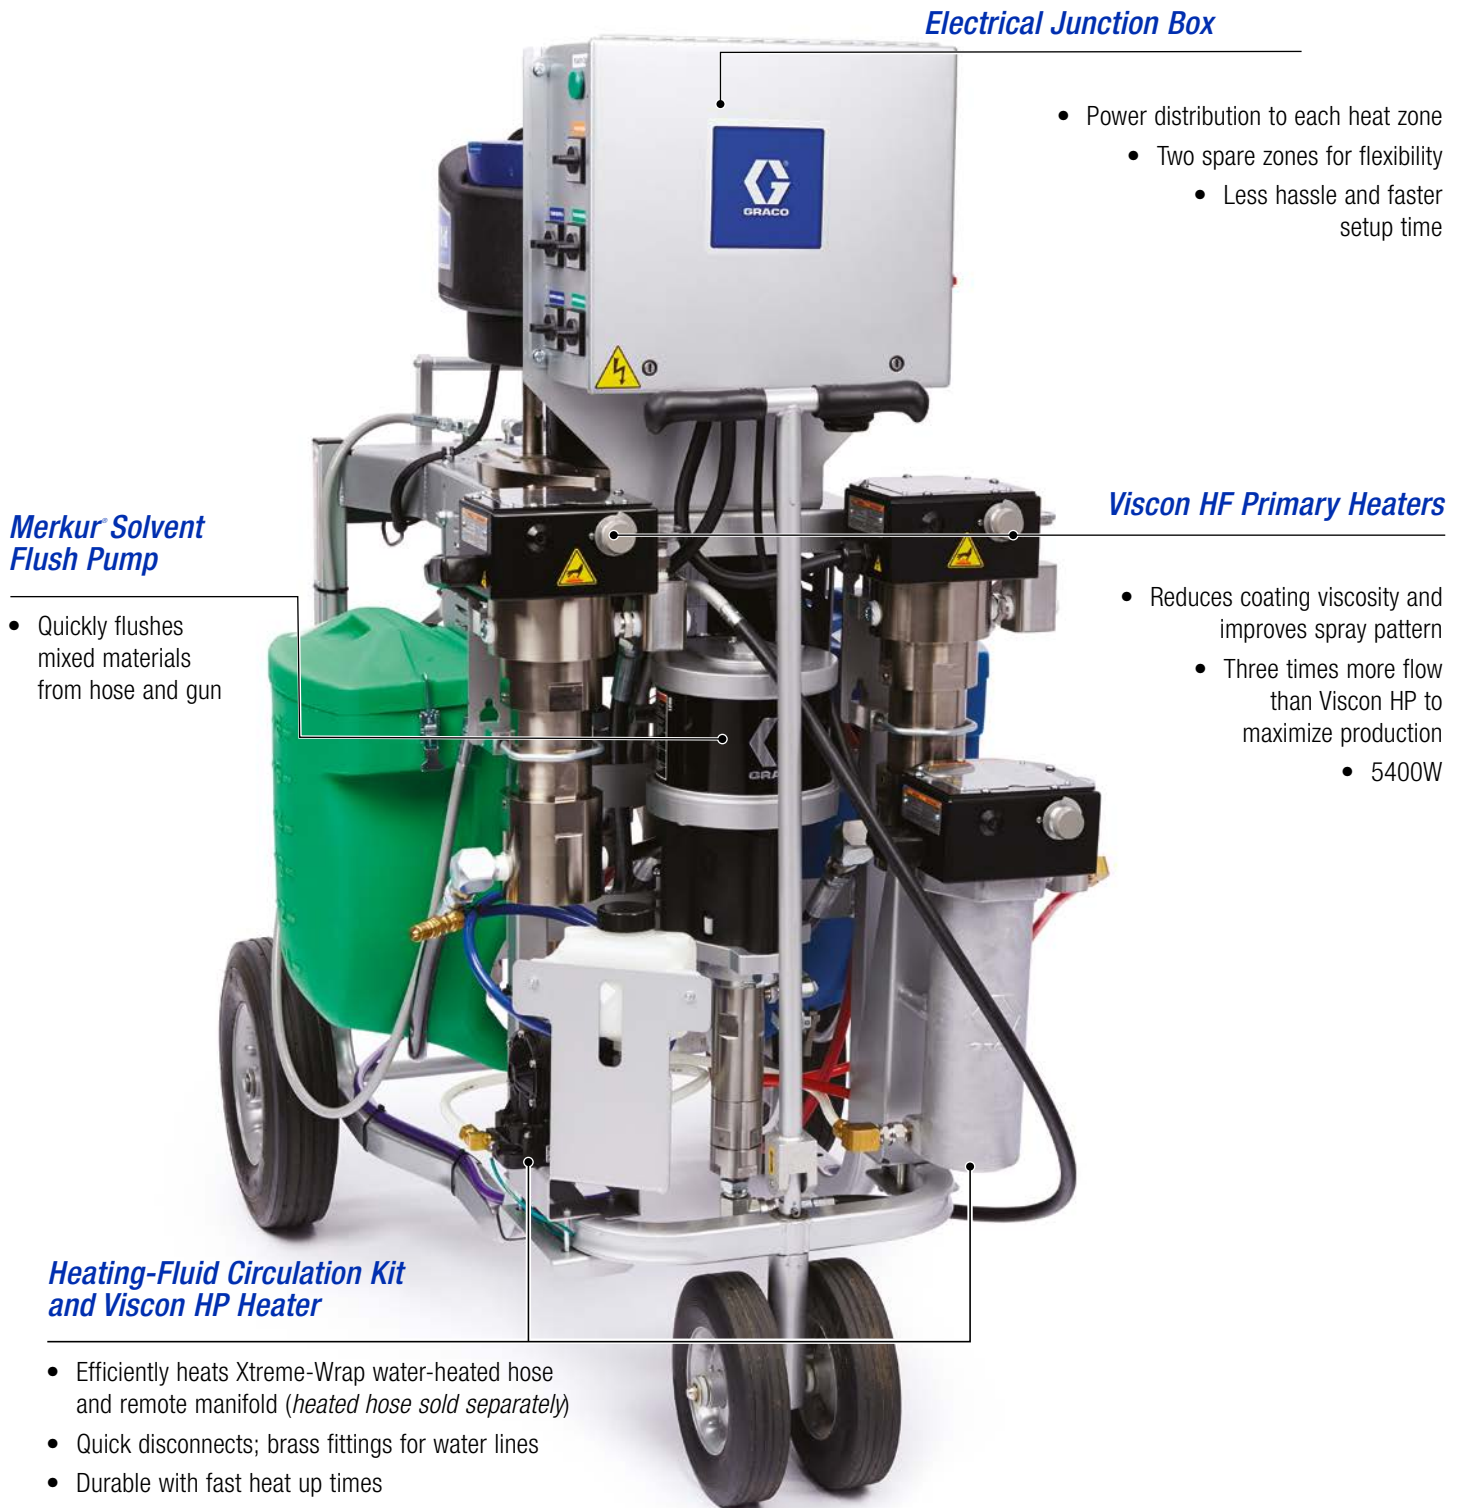

Complete Skid Solution

► Complete skid solution for your highest demand applications.

The Graco XPs-hf skid-based system is an all-in-one solution that combines the XP-hf Sprayer with improved material conditioning. The XPs-hf helps reduce waste, speed up cure times and improve mix ratio. With the durable, agitated heated tanks, your coatings will obtain the best conditioning to meet the highest demand applications – making you more productive.



Complete Skid Solution

High demand projects often require large spray tips or multiple guns. This complete solution will keep up with your operation, so your crew can focus on applying the coatings.

Xtreme-Duty Agitator

- Back-gearred with wide-paddled blades
- Mixes high viscosity coatings

5:1 Monark Feed Pump

- Tank length for convenience
- Feed lines with wye strainer
- Feeds high viscosity coatings

Pre-wired Junction Box

- One electrical input for all heating components
- Meets global electrical standards

Viscon HF Primary Heaters

- Reduces coating viscosity and improves spray pattern
- Three times more flow than Viscon HP to maximize production
 - 5400W

Heating-Fluid Circulation Kit and Viscon HP Heater


- Efficiently heats Xtreme-Wrap water-heated hose and remote manifold (heated hose sold separately)
- Quick disconnects; brass fittings for water lines
- Durable with fast heat up times

95 L (25 gal) SST-lined Heated Tank

- Double-walled construction
- 3000W heaters
- Conditions high viscosity coatings

Xtreme Pump Lowers

- Quick knock-down, easy to maintain
- Two metering pumps instead of three on traditional designs
 - Fewer repair parts

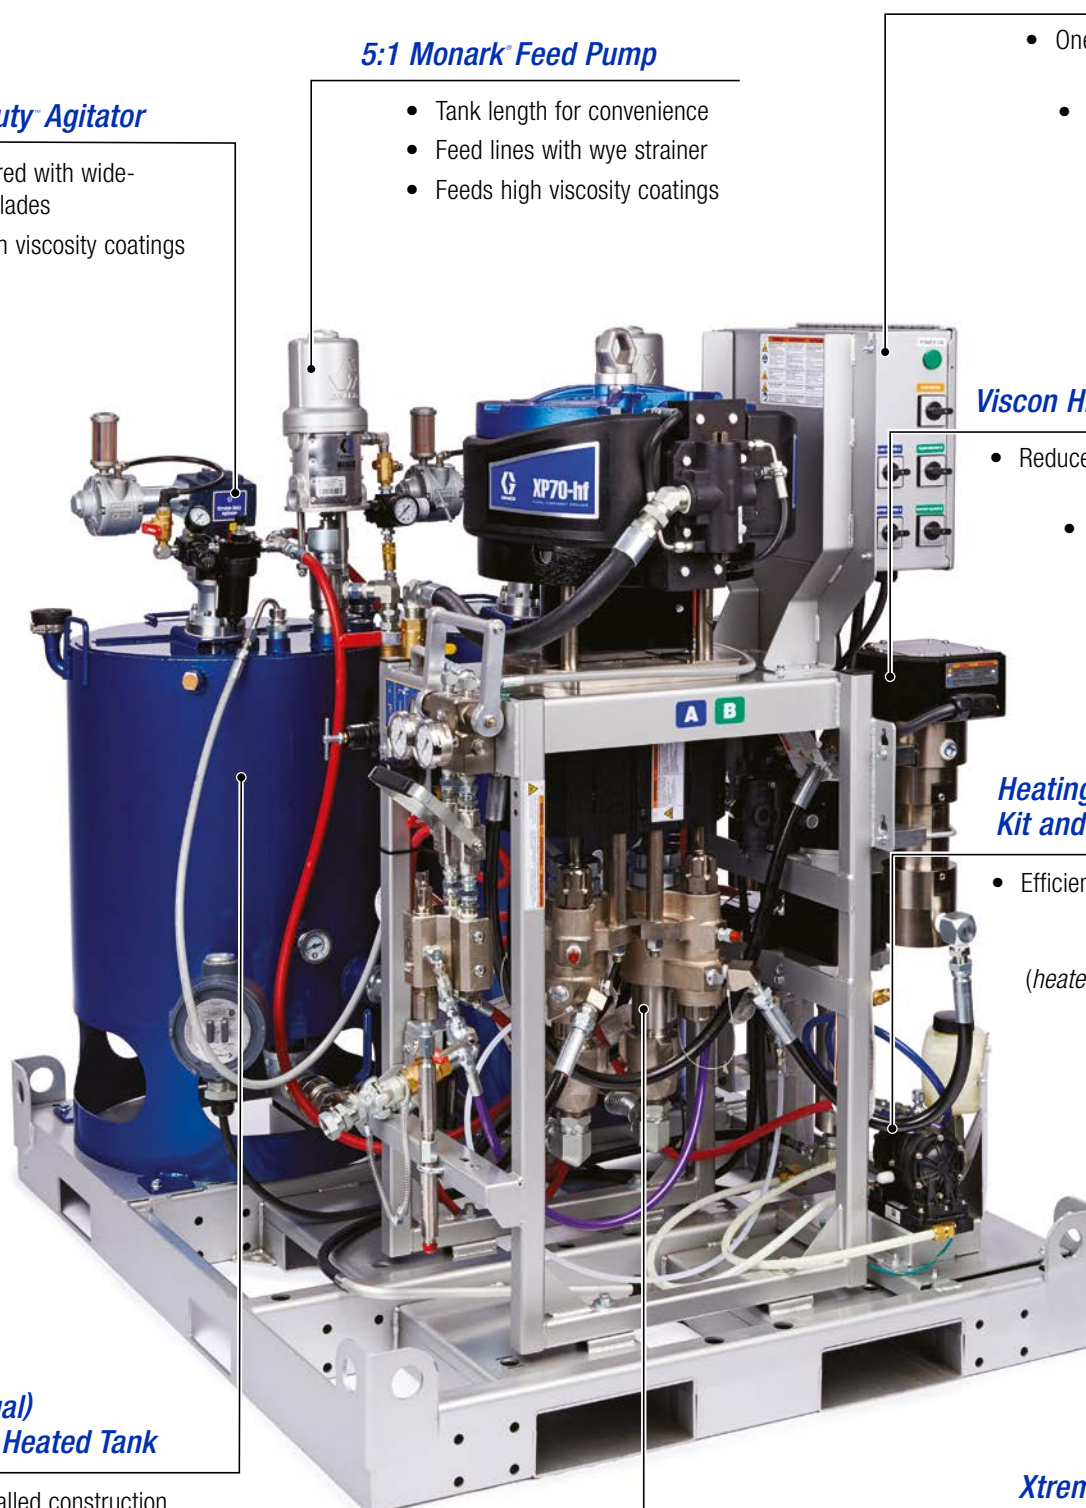

Complete Skid Solution

Hydraulic systems are the choice of spraying professionals who want to reap the benefits of the latest spraying technologies and add productivity to boost their financial bottom line. The Graco XP-h is ideal when compressed air is limited or for truck, palletized, trailer or flatbed systems that have on-board hydraulic power. The XP-h is available as a cart, stand or wall-mount system.

Gas-hydraulic Power Pack

- Portable for remote placement
- Quick-disconnect hydraulic connections
(Sold separately)

Viscount II Motor

- Ice free
- Energy efficient
- Smooth changeovers

Viscon HP Primary Heaters

- Reduces coating viscosity and improves spray pattern
- 4000W

Mix Manifold

- Provides simple fluid control for mixing or flushing
- Accurately dispenses A and B fluids to the static mix tube
- Choose to use mix manifold remotely to reduce solvent and material waste

Xtreme Pump Lowers

- Quick knock-down
- Easy to maintain
- Two metering pumps instead of three on traditional designs

Outlet Manifold and Valves

- Fluid pressure gauges to monitor pump output
 - Provides automatic overpressure relief
 - Includes circulation back to the supply for pump priming, purging and heating



On-Ratio Spraying

► On-ratio spraying means peace of mind.

With an optional PressureTrak™ or XP Pressure Monitor Kit, you have the assurance that your Graco XP is spraying on-ratio. It monitors the spray pressures on the A and B sides, and shuts down the sprayer if poor spraying conditions occur

The benefits are:

- Better overall productivity
 - projects are being finished on-time
- Confidence in the quality of your work
- Reduced labor and rework costs



PressureTrak



Pressure Monitor Kit



Ordering Information - Configurator

► XP Cart Configurations using XL3400 or XL6500 Air Motor

See Operation and Parts Manual 3A0420 for Technical Details.

FIRST 3 DIGITS		4TH + 5TH DIGITS		6TH DIGIT											
WHICH XP		MIX RATIO A/B LOWER		FEATURES / ADD ONS											
DIGITS 1, 2 + 3	UNIT	DIGITS 4 + 5	RATIO	DIGIT 6	PUMP ASSEMBLY Motor & Lowers	CART	HOPPERS 26 L (7 Gallon)	PRIMARY A/B HEATERS Viscon HP (2)	SOLVENT PUMP	JUNCTION BOX 5-zone	HEATING-FLUID CIRC PUMP Hose Heat	VISCON HP HEATER Hose Heat	RATIO ASSURANCE PressureTrak	HOSE & XTR GUN 10.7m (35 ft) Hose	EX MARKED
281	XP35	10	1:1	0	X										X
282	XP50			1	X	X								X	X
571	XP70	15	1.5:1	2	X	X	X							X	X
With Junction Box, Hose Heat or PressureTrak		20	2:1	3	X	X		240V	X					X	X
				4	X	X	X	240V	X					X	X
		25	2.5:1	5	X	X	X	240V	X	X				X	
				6	X	X	X	240V	X		X	240V	X	X	X
574	XP35	30	3:1	7	X	X	X	240V	X	X	X	240V	X	X	
575	XP50			8	X	X	X	480V	X	X				X	
576	XP70	40	4:1	9	X	X	X	480V	X	X	X	480V	X	X	

Ordering Information - Configurator

► XP-hf Cart Configurations using XL10000 Air Motor

See Operation and Parts Manual 3A4381 for Technical Details.

FIRST 3 DIGITS		4TH + 5TH DIGITS		6TH DIGIT											
WHICH XP		MIX RATIO		FEATURES / ADD ONS											
DIGITS 1, 2 + 3	UNIT	DIGITS 4 + 5	RATIO	DIGIT 6	PUMP ASSEMBLY Motor & Lowers	CART	HOPPERS 26 L (7 Gallon)	PRIMARY A/B HEATERS Viscon HF (2)	SOLVENT PUMP	JUNCTION BOX 5-zone	HEATING-FLUID CIRC PUMP Hose Heat	VISCON HP HEATER Hose Heat	RATIO ASSURANCE PressureTrak	HOSE & XTR GUN 10.7m (35 ft) Hose	EX MARKED
573	XP50-hf	10	1:1	0	X										X
		15	1.5:1	1	X	X								X	X
		20	2:1	2	X	X	X							X	X
		25	2.5:1	3	X	X		240V	X					X	X
572	XP70-hf	30	3:1	4	X	X	X	240V	X					X	X
		35	3.5:1	5	X	X	X	240V	X	X				X	
		40	4:1	6	X	X	X	240V	X		X	240V	X	X	X
		45	4.5:1	7	X	X	X	240V	X	X	X	240V	X	X	

XP-hf Cart Configurations with No Lower

572000 XP70-hf – no lowers, with cart 10.7m (35 ft), fluid hose and XTR gun

573000 XP50-hf – no lowers, with cart 10.7m (35 ft), fluid hose and XTR gun

Ordering Information - Configurator

► XPs-hf Skid Configurations using XL10000 Air Motor

See Operation and Parts Manual 3A6283 for Technical Details.

FIRST 3 DIGITS		4TH + 5TH DIGITS		6TH DIGIT											
WHICH XP		MIX RATIO		FEATURES / ADD ONS											
DIGITS 1, 2 + 3	UNIT	DIGITS 4 + 5	RATIO	DIGIT 6	PUMP ASSEMBLY Motor & Lowers	SKID	HOPPERS 95 L (25 Gallon) sst lined Heated with XD agitator	PRIMARY A/B HEATERS Viscon HF (2)	SOLVENT PUMP	JUNCTION BOX 5-zone	HEATING-FLUID CIRC PUMP Hose Heat	VISCON HP HEATER Hose Heat	RATIO ASSURANCE PressureTrak	HOSE & XTR GUN 10.7m (35 ft) Hose	EX MARKED
578	XP50s-hf	10	1:1	1	x	x	x	240V	x	x	x	240V		x	
		20	2:1												
577	XP70s-hf	30	3:1	2	x	x	x	240V	x	x				x	
		40	4:1												

Ordering Information - Configurator

► XP-h (hydraulic) Cart Configurations using Viscount II Hydraulic Motor

See Operation and Parts Manual 3A0420 for Technical Details.

FIRST 3 DIGITS		4TH + 5TH DIGITS		6TH DIGIT								
WHICH XP		MIX RATIO		FEATURES / ADD ONS								
DIGITS 1, 2 + 3	UNIT	DIGITS 4 + 5	RATIO	DIGIT 6	MAX WORKING PRESSURE	PUMP ASSEMBLY Motor & Lowers	CART	HOPPERS 26 L (7 Gallon)	PRIMARY A/B HEATERS Viscon HP (2)	SOLVENT PUMP	HOSE & XTR GUN 10.7m (35 ft) Hose	EX MARKED
284	XP-h	10	1:1	4	345 bar 5000 psi	x	x	x			x	
		20	2:1	5	345 bar 5000 psi	x	x	x	240V	x	x	
		25	2.5:1	6	500 bar 7250 psi	x	x	x			x	
		30	3:1	7	500 bar 7250 psi	x	x	x	240V	x	x	
		40	4:1									

Note: 24X011 gas/hydraulic power pack available for these models.

XP Options and Accessories



SST Lined Heated Hoppers

- 95 L (25-gal) double-walled tank
- 3000W immersion heaters
- Xtreme-Duty agitator
- 5:1 Monark feed pump
- Gravity or pressure feed
- Floor or caster mount



Polyethylene Heated Hoppers

- 76 L (20-gal) double-walled tank
- Set up for gravity or pressure feed
- Accepts both agitator and feed pump
- Jacketed for heated water/glycol or oil
- Tank heating using immersion heaters or Viscon™ HP heated circulation



Merkur® Solvent Flush Pump

- Quickly flushes mixed materials from hose and gun
- Provides enough pressure to push good paint out of the mix hose with a spray pattern, resulting in less wasted material
- Prime valve can be used to supply flushing solvent for tip cleaning, or to flush a second hose and gun that have been removed from the tee in the mix line



Xtreme-Duty® Drum Agitator

- Designed specifically with protective coatings materials in mind
- Special blades are designed to keep high viscosity materials in suspension
- Better mixing and quality control of your high solids coatings



Xtreme Pump Lower

- Change one or both lowers for desired mix ratio
- XP uses specific Xtreme pump lowers with spring-loaded inlet valves, 30mesh filters, and no prime valves
- Overpressure rupture protection included on 36 cc, 48 cc, 54 cc, 58 cc and 72 cc sizes



Viscon® Fluid Heaters

- Reduces viscosity so the mixture can be sprayed at lower pressure
- Provides consistent spray temperature, resulting in a consistent spray pattern and better thickness control
- Mounts easily onto slotted holes on XP cart *(requires heater mounting kit 262450)*
- Standard or hazardous atmosphere



Graco Gun Splitter

The Graco Gun Splitter lets you use two spray guns with one XP Plural-Component Sprayer. In addition, you can independently clean and flush one gun, while the other gun remains in use. If you are using a higher production XP machine such as the XP50 or XP70, the Gun Splitter helps you become even more productive.



Remote Mount Mix Manifold

- Mix manifold on cart is removable and can be located closer to the spray gun to reduce the volume of mixed coatings and required flush solvent - results in less wasted materials
- A and B hoses from the XP cart to the mix manifold do not need to be flushed and can be sized for less pressure loss over long runs
- Manifold is heated when using water/glycol heated hose



Xtreme-Wrap Water Heated Hose

- Maximum heat transfer with four water/glycol heated hoses
- Re-closeable scuff guard and insulation – easy to change A/B hose sizes to balance pressures at different mix ratios
- Transportation grade brass water fittings stay tight, do not leak

Ordering Information - Accessories

Xtreme-Wrap Water Heated Hoses - 15.2 m (50 ft)

24M440	3/8 in x 1/4 in - 345 bar (34.5 MPa - 5000 psi)	248118	1/2 in x 1/2 in - 500 bar (50 MPa - 7250 psi)
24M441	3/8 in x 3/8 in - 345 bar (34.5 MPa - 5000 psi)	248119	3/8 in x 3/8 in - 500 bar (50 MPa - 7250 psi)
24M442	1/2 in x 1/4 in - 345 bar (34.5 MPa - 5000 psi)	248120	1/2 in x 3/8 in - 500 bar (50 MPa - 7250 psi)
24M443	1/2 in x 3/8 in - 345 bar (34.5 MPa - 5000 psi)	248121	3/8 in x 1/4 in - 500 bar (50 MPa - 7250 psi)
24M444	1/2 in x 1/2 in - 345 bar (34.5 MPa - 5000 psi)	24M439	1/2 in x 1/4 in - 500 bar (50 MPa - 7250 psi)


Electrically Heated Hoses - 15.2 m (50 ft), with FTS cable

248907	1/4 in x 3/8 in - 345 bar (34.5 MPa - 5000 psi)	262730	1/2 in x 1/2 in - 345 bar (34.5 MPa - 5000 psi)
248908	3/8 in x 3/8 in - 345 bar (34.5 MPa - 5000 psi)	24P616	Electric hose heat control kit
262727	1/2 in x 1/4 in - 345 bar (34.5 MPa - 5000 psi)	24M943	Fluid temperature sensor kit (FTS), 1/2 NPT
262728	1/2 in x 3/8 in - 345 bar (34.5 MPa - 5000 psi)		

Xtreme-Duty™ High-Pressure Hose Selection Chart

Example:

H53850 is a 386 bar (5600 psi) - 3/8 in - 15.2 m (50 ft) hose

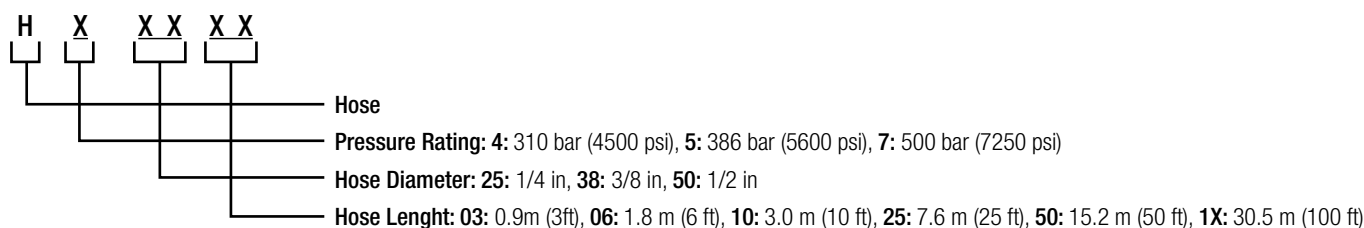

Accessories

Static Mixing, 500 bar (50 Mpa - 7250 psi)

248927	25-pack, disposable, 1/2 in, 12 element
262478	Static mix housing, 1/2 in ID x 5 in
511352	Static mixer, SST, 3/8 in x 9.5 in

Hoppers

24F376	Blue for resin side 26.5 L (7-gal) hopper kits with bracket and hardware to mount on an XP cart
24F377	Green for hardener side 26.5 L (7-gal) hopper kits with bracket and hardware to mount on an XP cart
24Y389	Stainless Steel 37.8 L (10-gal) hopper for XP or XP-hf cart units
262454	Desiccant dryer kit. Bulkhead fitting and 2-pack of cartridges for one 26 L (7-gal) hopper

Ratio Assurance - Non-hazardous locations

262940	Pressure monitor kit (XP), wall powered with light tower
262942	Pressure monitor kit (XP), air powered with light tower
26C008	Pressure monitor kit (XP-hf, XPs-hf), wall powered with light tower
26C009	Pressure monitor kit (XP-hf, XPs-hf), air powered with light tower

Ratio Assurance - Hazardous locations

26C426	PressureTrak for XL3400 motor (XP35)
26C427	PressureTrak for XL6500 motor (XP50, XP70)
25C452	PressureTrak for XL10000 motor (XP-hf, XPs-hf)

Manifolds

24M398	Quick-Set mix manifold with carriage, A/B pressure gauges and A/B flush valves
262807	Standard mix manifold, no carriage
262522	Carriage only - no mix manifold
262826	Gun Splitter manifold
262784	Circulation manifold w/pressure relief for 241 bar rated XP's (3500 psi)
262783	Circulation manifold w/pressure relief for 345 bar rated XP's (5000 psi)
262806	Circulation manifold w/pressure relief for 500 bar rated XP's (7250 psi)
262808	Valve, over pressure relief, purple, 241 bar XP's (3500 psi)
262809	Valve, over pressure relief, gold, 345 bar XP's (5000 psi)
262520	Valve, over pressure relief, silver, 500 bar XP's (7250 psi)

Miscellaneous

262739	Ball Valve, 1/2 in, 500 bar (50 Mpa - 7250 psi) - with handle
262740	Ball Valve, 1/2 in, 500 bar (50 Mpa - 7250 psi) - no handle
24M281	Stand for bare air- or hydraulic XP units
262812	Wall bracket for bare air- or hydraulic XP units

Ordering Information - Accessories

Supply Processing Equipment

Supply Pump Kits

Includes 3/4 in x 3.0 m (10 ft) fluid hose, air regulator kit, air hose, fluid strainer and ball valve

256275 T2 2:1 drum pump

256276 Monark® 5:1, drum pump

Agitator Kit

248824 Twistork® with air connection to work with feed pump kits (reference manual 310863)

Solvent Flush Kit - Mounts to XP cart

262393 Merkur 45:1. Includes air controls, pail siphon, and 0.9 m (3 ft) hose to mix manifold

95 L (25-gal) Heated Stainless Steel Lined Hoppers -

26C482 SST lined heated hopper, 3000W immersion heater, 5:1 Monark and Xtreme Duty Agitator - floor mount for XPS units

26C549 Tank base kit. Includes fork pockets and casters for improved mobility

76 L (20-gal) Double Wall Immersion

Heated Polyethylene Hopper Kits

For standard atmospheres. (Each kit includes a 230V, 1500W immersion heater)

24N352 Gravity feed hopper, agitator, stand kit, flexible inlet kit with ball valve

24N354 Pump feed hopper, agitator, stand kit, (order feed pump kit separately)

76 L (20 gal) Double Wall

Circulation Polyethylene Hopper

24N353 Gravity feed hopper, agitator, stand kit, flexible inlet kit with ball valve

24N355 Pump feed hopper, agitator, stand kit, (order feed pump kit separately)

Temperature Controlling Equipment

262450 Heater mounting kit. Includes hose and fittings to mount one primary heater on the XP cart. Two heaters can be mounted on an XP cart.

Viscon HP Fluid Heaters - Hazardous locations

245848 120 VAC single phase - 2300 watts - 19.2 amps

245862 200 VAC single phase - 4000 watts - 20 amps

245863 240 VAC single phase - 4000 watts - 16.7 amps

246254 380 VAC single phase - 4000 watts - 10.5 amps

245864 480 VAC single phase - 4000 watts - 8.3 amps

Viscon HP Fluid Heaters - Non-hazardous locations

245867 120 VAC single phase - 2300 watts - 19.2 amps

245868 200 VAC single phase - 4000 watts - 20 amps

Heating Fluid Circulation Kit

25N580 Circulation kit, heating fluid - includes pump, remote manifold heater block, mounting hardware and 245869 Viscon HP (240V) for XPS units

26C051 Circulation kit, heating fluid - includes pump, remote manifold heater block and mounting hardware (Viscon HP heater ordered separately) - For XP-HF

26C078 Retrofit kit, used with 26C051 or 25N580 for adding heated circulation to polyethylene hoppers - For XP-HF

24Z934 Retrofit kit, remote manifold heater block. Adds remote manifold heat to existing water-heated hose systems - For all XP units

Xtreme-Duty Drum Agitators

25A599 Agitator on drum cover with handles

25A600 Agitator on drum cover with elevator

25A601 Agitator on drum cover with elevator and 5:1 CS Monark feed pump

25A602 Agitator on drum cover with elevator and 5:1 SST Monark feed pump

25A603 Agitator on drum cover with elevator and 10:1 CS President feed pump

25A604 Agitator on drum cover with elevator and 10:1 SST President feed pump

Miscellaneous

246978 Dual drum circulation kit with 1/2 in x 3.0 m (10 ft) hoses and 2 return tubes/desiccant kits

246477 Drum return tube/desiccant kit (requires fitting 159842 for XP return line)

Viscon HP Fluid Heaters (continued) - Non-hazardous locations

245869 240 VAC single phase - 4000 watts - 16.7 amps

246276 380 VAC single phase - 4000 watts - 10.5 amps

245870 480 VAC single phase - 4000 watts - 8.3 amps

Viscon HF Fluid Heaters - Hazardous locations

25C962 240 VAC single phase - 5400 watts - 22.5 amps
Thermostat Control for XP-HF

Viscon HF Fluid Heaters - Non-hazardous locations

25C961 240 VAC single phase - 5400 watts - 22.5 amps
Thermostat Control for XP-HF

Band Heaters - Not approved for explosive atmospheres

15F028 Heater - drum - 1000 watts - 230V



ABOUT GRACO

Founded in 1926, Graco is a world leader in fluid handling systems and components. Graco products move, measure, control, dispense and apply a wide range of fluids and viscous materials used in vehicle lubrication, commercial and industrial settings.

The company's success is based on its unwavering commitment to technical excellence, world-class manufacturing and unparalleled customer service. Working closely with qualified distributors, Graco offers systems, products and technology that set the quality standard in a wide range of fluid handling solutions. Graco provides equipment for spray finishing, protective coating, paint circulation, lubrication, and dispensing sealants and adhesives, along with power application equipment for the contractor industry. Graco's ongoing investment in fluid management and control will continue to provide innovative solutions to a diverse global market.

GRACO LOCATIONS

MAILING ADDRESS

P.O. Box 1441
Minneapolis, MN 55440-1441
Tel: 612-623-6000
Fax: 612-623-6777

AMERICAS

MINNESOTA

Worldwide Headquarters
Graco Inc.
88-11th Avenue N.E.
Minneapolis, MN 55413

EUROPE

BELGIUM

European Distribution Center
Graco Distribution BVBA
Industrieterrein-Oude Bunders
Slakweidestraat 31
3630 Maasmechelen,
Belgium
Tel: 32 89 770 700
Fax: 32 89 770 777

ASIA PACIFIC

AUSTRALIA

Graco Australia Pty Ltd.
Suite 17, 2 Enterprise Drive
Bundoora, Victoria 3083
Australia
Tel: 61 3 9468 8500
Fax: 61 3 9468 8599

CHINA

Graco Hong Kong Ltd.
Shanghai Representative Office
Building 7
1029 Zhongshan Road South
Huangpu District
Shanghai 200011
The People's Republic of China
Tel: 86 21 649 50088
Fax: 86 21 649 50077

INDIA

Graco Hong Kong Ltd.
India Liaison Office
Room 432, Augusta Point
Regus Business Centre 53
Golf Course Road
Gurgaon, Haryana
India 122001
Tel: 91 124 435 4208
Fax: 91 124 435 4001

JAPAN

Graco K.K.
1-27-12 Hayabuchi
Tsuzuki-ku
Yokohama City, Japan 2240025
Tel: 81 45 593 7300
Fax: 81 45 593 7301

KOREA

Graco Korea Inc.
38, Samsung 1-ro 1-gil
Hwaseong-si, Gyeonggi-do, 18449
Republic of Korea
Tel: 82 31 8015 0961
Fax: 82 31 613 9801

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice.

Graco is certified ISO 9001.

Europe
+32 89 770 700
FAX +32 89 770 777
WWW.GRACO.COM

©2019 Graco Distribution BVBA 350210ENEU Rev. A 08/19 Printed in Europe.
All other brand names or marks are used for identification purposes and are trademarks of their respective owners.
For more information on Graco's intellectual property, see www.graco.com/patent or www.graco.com/trademarks.