


WILDEN®

EOM
Engineering
Operation &
Maintenance

A100
Plastic Pump

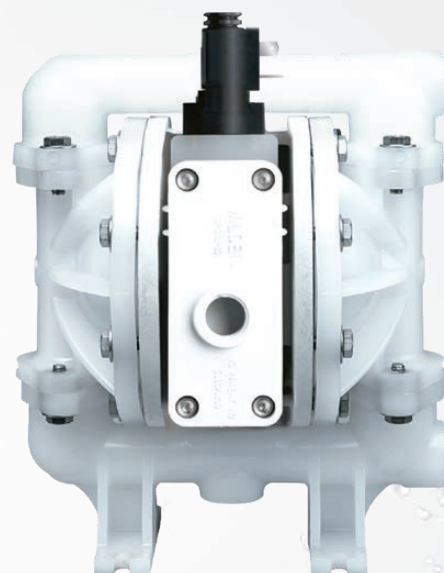


Where Innovation Flows

wildenpump.com



TABLE OF CONTENTS

SECTION 1	CAUTIONS—READ FIRST!	1
SECTION 2	WILDEN PUMP DESIGNATION SYSTEM	2
SECTION 3	DIMENSIONAL DRAWINGS	3
SECTION 4	PERFORMANCE	
	A100 Plastic Rubber-Fitted	4
	A100 Plastic PTFE-Fitted	4
	Suction- Lift Curves	5
SECTION 5	EXPLODED VIEW & PARTS LISTING	6
SECTION 6	ELASTOMER OPTIONS	8

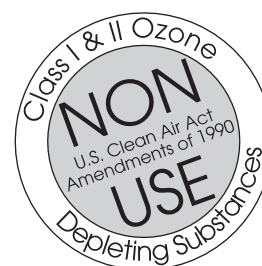

CAUTION—READ FIRST!**TEMPERATURE LIMITS:**

Acetal	−29°C to 82°C	−20°F to 180°F
Buna-N	−12°C to 82°C	10°F to 180°F
Geolast®	−40°C to 82°C	−40°F to 180°F
Neoprene	−18°C to 93°C	0°F to 200°F
Nordel® EPDM	−51°C to 138°C	−60°F to 280°F
Nylon	−18°C to 93°C	0°F to 200°F
PFA	−7°C to 107°C	45°F to 225°F
Polypropylene	0°C to 79°C	32°F to 175°F
Polyurethane	−12°C to 66°C	10°F to 150°F
PVDF	−12°C to 107°C	10°F to 225°F
Saniflex™	−29°C to 104°C	−20°F to 220°F
SIPD PTFE with EPDM-backed	4°C to 137°C	40°F to 280°F
SIPD PTFE with Neoprene-backed	4°C to 93°C	40°F to 200°F
PTFE ¹	4°C to 104°C	40°F to 220°F
FKM	−40°C to 177°C	−40°F to 350°F
Wil-Flex™	−40°C to 107°C	−40°F to 225°F

¹4°C to 149°C (40°F to 300°F) - 13 mm (1/2") and 25 mm (1") models only.

NOTE: Not all materials are available for all models. Refer to Section 2 for material options for your pump.



CAUTION: When choosing pump materials, be sure to check the temperature limits for all wetted components. Example: FKM has a maximum limit of 177°C (350°F) but polypropylene has a maximum limit of only 79°C (175°F).



CAUTION: Maximum temperature limits are based upon mechanical stress only. Certain chemicals will significantly reduce maximum safe operating temperatures. Consult engineering guide for chemical compatibility and temperature limits.



CAUTION: Always wear safety glasses when operating pump. If diaphragm rupture occurs, material being pumped may be forced out air exhaust.



WARNING: Prevent static sparking. If static sparking occurs, fire or explosion could result. Proper grounding of pump, valves, and containers is critical when handling flammable fluids and whenever discharge of static electricity is a hazard.



CAUTION: Do not exceed 8.6 bar (125 psig) air supply pressure.



CAUTION: Plastic pumps are made with plastic that is not UV-stabilized. Direct sunlight for prolonged periods can cause deterioration of plastics.



CAUTION: Before any maintenance or repair is attempted, the compressed air line to the pump should be disconnected and all air pressure allowed to bleed from pump. Disconnect all intake, discharge and air lines. Drain the pump by turning it upside down and allowing any fluid to flow into a suitable container.



CAUTION: Blow out air line for 10 to 20 seconds before attaching to pump to make sure all pipe line debris is clear. Use an in-line air filter. A 5μ (micron) air filter is recommended.



NOTE: Tighten all bolts prior to installation. Fasteners may loosen during transportation.



NOTE: When installing PTFE diaphragms, it is important to tighten outer pistons simultaneously (turning in opposite directions) to ensure tight fit.



CAUTION: Verify the chemical compatibility of the process and cleaning fluid to the pump's component materials in the Chemical Resistance Guide.



CAUTION: When removing the end cap using compressed air, the air valve end cap may come out with considerable force. Hand protection such as a padded glove or rag should be used to capture the end cap.



CAUTION: Do not over-tighten the air inlet reducer bushing. Additionally, too much torque on the muffler may damage the air valve muffler plate.



CAUTION: The A100 plastic pump is not submersible.



CAUTION: Only explosion proof (NEMA 7) solenoid valve should be used in areas where explosion proof equipment is required.

WILDEN PUMP DESIGNATION SYSTEM

A100 PLASTIC

13 mm (1/2") Pump
 Maximum Flow Rate:
 42.4 lpm (11.2 gpm)

LEGEND

A100P / XXXXX / XXX / XX / XXX / XXXX

MODEL

 AIR VALVE
 CENTER SECTION
 WETTED PARTS & OUTER PISTON

DIAPHRAGMS

VALVE BALLS

O-RINGS
VALVE SEATSSPECIALTY
CODE
(if applicable)

MATERIAL CODES

AIR SYSTEM BASE TYPE

P = PRO-FLO®
 B = ADAPTER BLOCK

WETTED PARTS & OUTER PISTON

KK = PVDF / PVDF
 PP = POLYPROPYLENE /
 POLYPROPYLENE

CENTER SECTION

PP = POLYPROPYLENE

AIR VALVE

P = POLYPROPYLENE

DIAPHRAGMS

BNS = BUNA-N (Red Dot)
 FSS = SANIFLEX™ [Hytrel®
 (Cream)]
 PUS = POLYURETHANE
 (Clear)
 THU = PTFE W/HIGH-TEMP
 BUNA-N BACKUP
 (White)
 TNL = PTFE W/NEOPRENE
 BACKUP O-RING, IPD
 (White)
 TNU = PTFE W/NEOPRENE
 BACKUP (White)
 VTS = FKM (White Dot)
 WFS = WIL-FLEX™
 [Santoprene®
 (Three Black Dots)]

VALVE BALLS

BN = BUNA-N (Red Dot)
 FS = SANIFLEX™
 [Hytrel® (Cream)]
 PU = POLYURETHANE
 (Brown)
 TF = PTFE (White)
 VT = FKM (White Dot)
 WF = WIL-FLEX™
 [Santoprene®
 (Three Black Dots)]

VALVE SEATS

K = PVDF
 P = POLYPROPYLENE


VALVE SEAT O-RINGS

BN = BUNA-N
 FS = SANIFLEX™
 [Hytrel® (Cream)]
 PU = POLYURETHANE
 (Brown)
 TV = PTFE ENCAP. FKM
 WF = WIL-FLEX™
 (Santoprene®)


SPECIALTY CODES

0150 Accu-Flo™, 24V DC coil
 0151 Accu-Flo™, 24V AC / 12V DC coil
 0155 Accu-Flo™, 110V AC coil
 0160 Accu-Flo™, 24V DC coil, BSPT
 0512 Adapter block, no muffler, Pro-Flo®, center section
 0682 P100 with OEM manifold, Accu-Flo™ 24V DC Coil

NOTE: Most elastomeric materials use colored dots for identification.

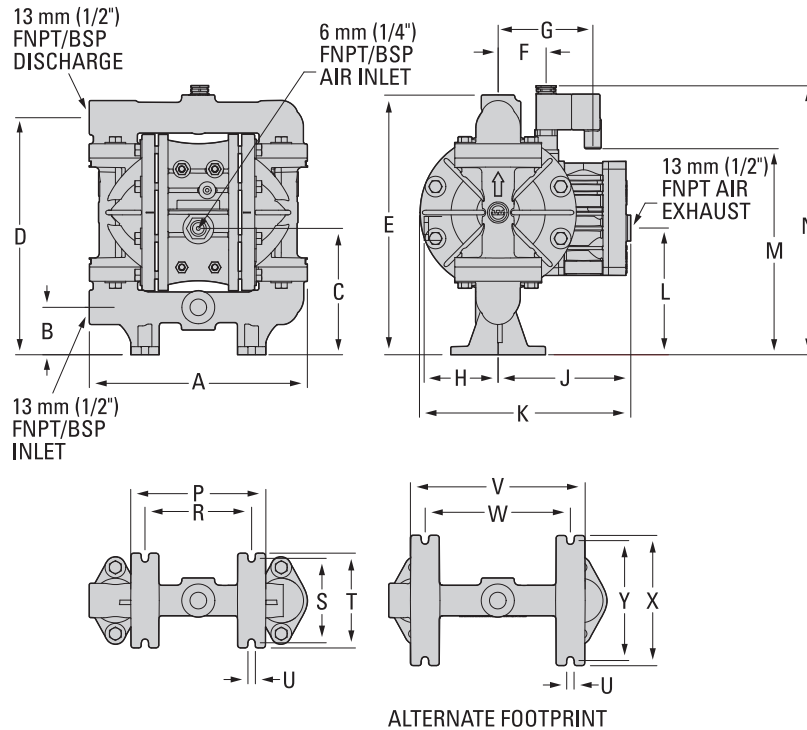A100 PLASTIC

DIMENSIONS

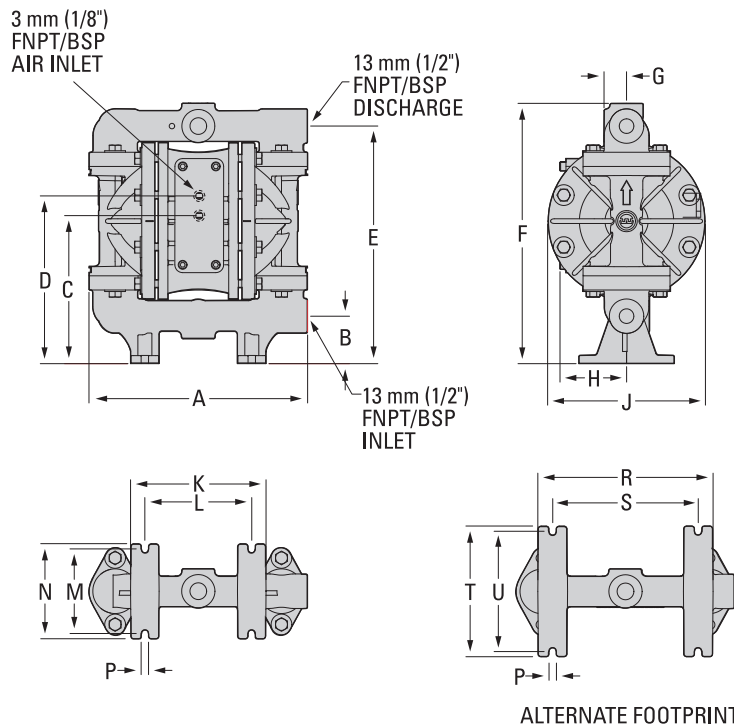ITEM	METRIC (mm)	STANDARD (inch)
A	234	9.2
B	51	2.0
C	135	5.3
D	254	10.0
E	279	11.0
F	51	2.0
G	102	4.0
H	79	3.1
J	142	5.6
K	226	8.9
L	137	5.4
M	224	8.8
N	277	10.9
P	145	5.7
R	114	4.5
S	91	3.6
T	102	4.0
U	8	0.3
V	188	7.4
W	155	6.1
X	140	5.5
Y	130	5.1

A100B PLASTIC

DIMENSIONS

ITEM	METRIC (mm)	STANDARD (inch)
A	234	9.2
B	51	2.0
C	157	6.2
D	180	7.1
E	254	10.0
F	279	11.0
G	25	1.0
H	66	2.6
J	168	6.6
K	145	5.7
L	114	4.5
M	91	3.6
N	102	4.0
P	8	0.3
R	188	7.4
S	155	6.1
T	140	5.5
U	130	5.1


A100 PLASTIC RUBBER-FITTED

Est. Ship Weight..... Polypropylene 4 kg (8 lb)
PVDF 5 kg (10 lb)
Air Inlet..... 6 mm (1/4")
Inlet..... 13 mm (1/2")
Outlet..... 13 mm (1/2")
Suction Lift..... Dry 6.6 m (21.5')
Wet 9.0 m (29.5')
Disp. Per Stroke¹..... 0.11 L (0.03 gal)
Max. Flow Rate..... 42.4 lpm (11.2 gal)
Max. Size Solids..... 1.6 mm (1/16")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2.0 bar (30 psig) head pressure.

Example: To pump 17.4 lpm (4.6 gpm) against a discharge head pressure of 1.4 bar (20 psig) requires 2.8 bar (40 psig) and 13.6 Nm³/h (8 scfm) air consumption. (See dot on chart.)

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

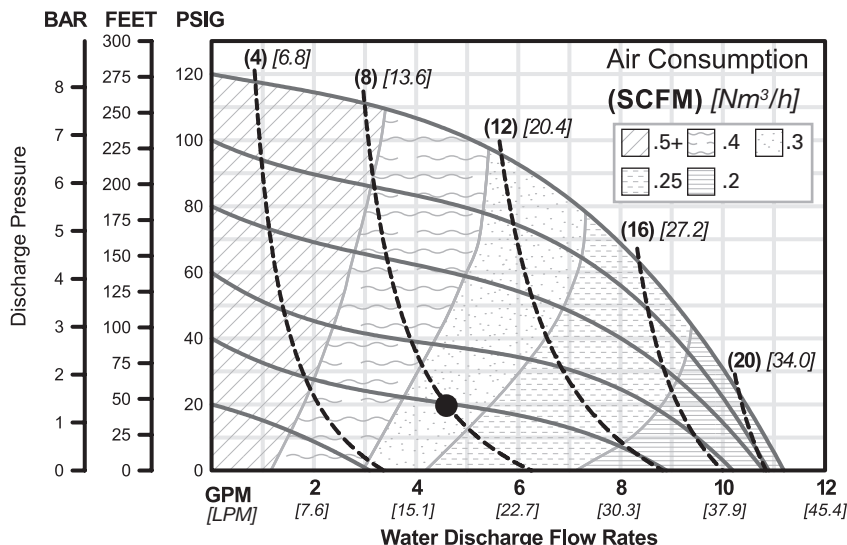

Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump's performance curve.


A100 PLASTIC PTFE-FITTED

Est. Ship Weight..... Polypropylene 4 kg (8 lb)
PVDF 5 kg (10 lb)
Air Inlet..... 6 mm (1/4")
Inlet..... 13 mm (1/2")
Outlet..... 13 mm (1/2")
Suction Lift..... Dry 5.7 m (18.7')
Wet 9.3 m (30.6')
Disp. Per Stroke¹..... 0.11 L (0.03 gal)
Max. Flow Rate..... 38.2 lpm (10.1 gal)
Max. Size Solids..... 1.6 mm (1/16")

¹Displacement per stroke was calculated at 4.8 bar (70 psig) air inlet pressure against a 2.0 bar (30 psig) head pressure.

Example: To pump 11.4 lpm (3.0 gpm) against a discharge head pressure of 2.1 bar (30 psig) requires 2.8 bar (40 psig) and 6.8 Nm³/h (4 scfm) air consumption. (See dot on chart.)

Caution: Do not exceed 8.6 bar (125 psig) air supply pressure.

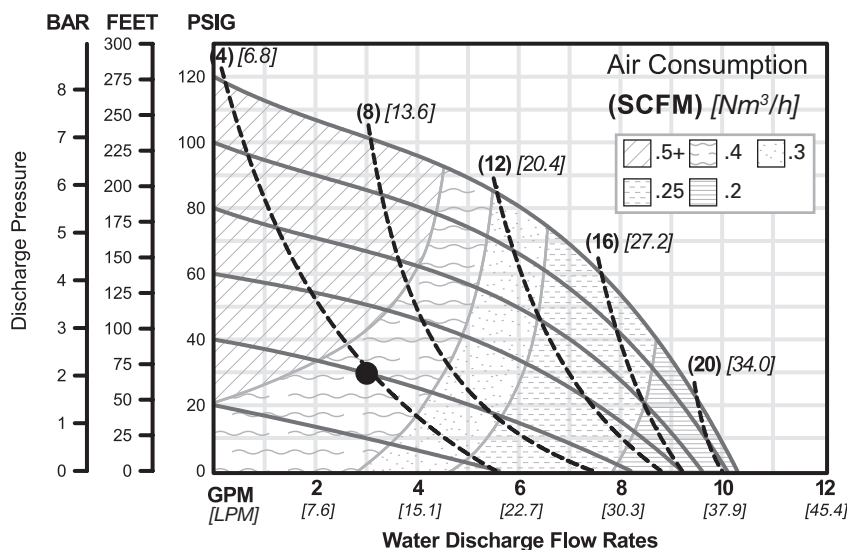



Flow rates indicated on chart were determined by pumping water.

For optimum life and performance, pumps should be specified so that daily operation parameters will fall in the center of the pump's performance curve.

SUCTION-LIFT CURVES

These curves demonstrate the flow created when the stroke rate is modified under static air and fluid pressure condition. This curve can be applied to different pressure conditions to estimate the change in flow due to stroke rate.


A100 PLASTIC

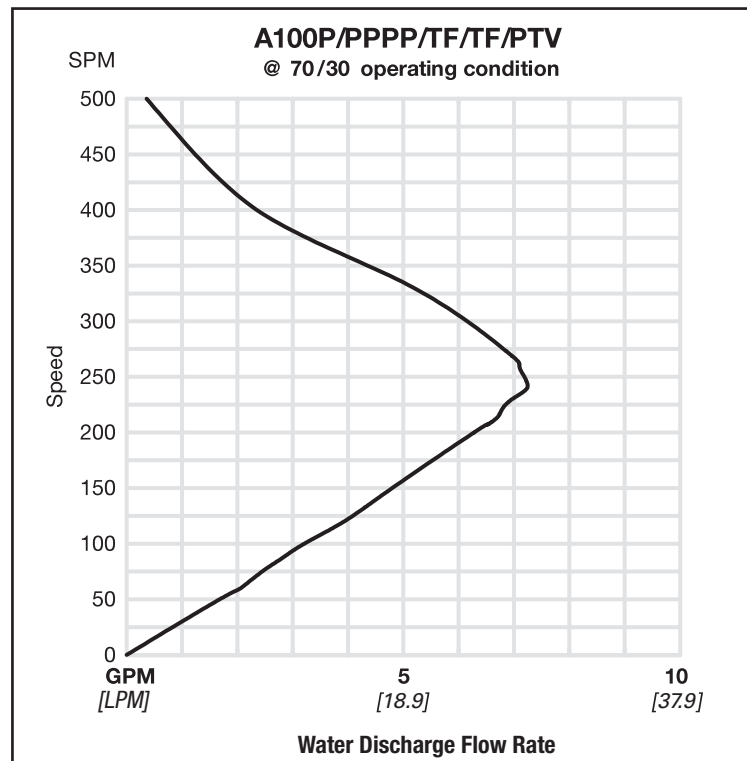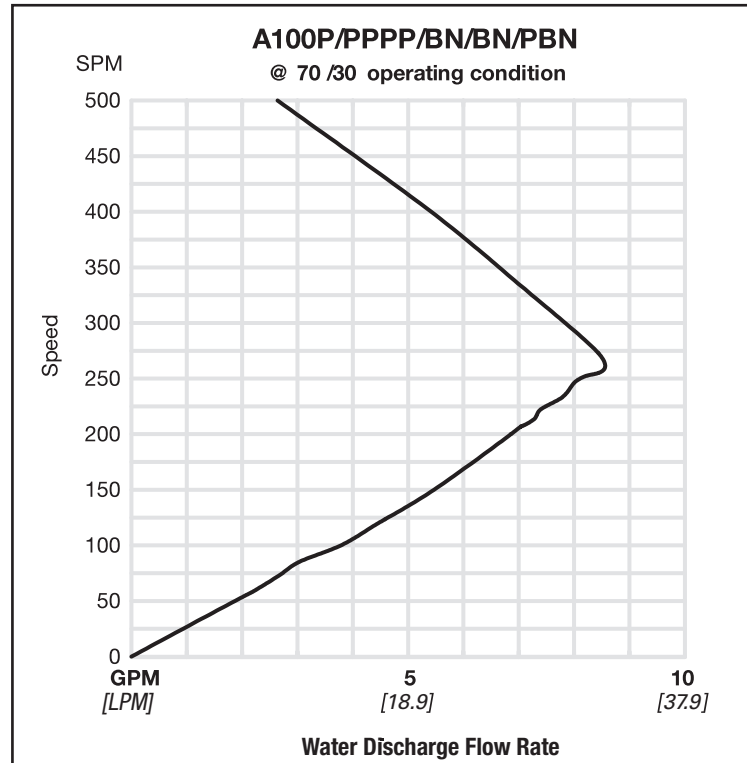

EXPLODED VIEW & PARTS LISTING

A100 PLASTIC

EXPLODED VIEW

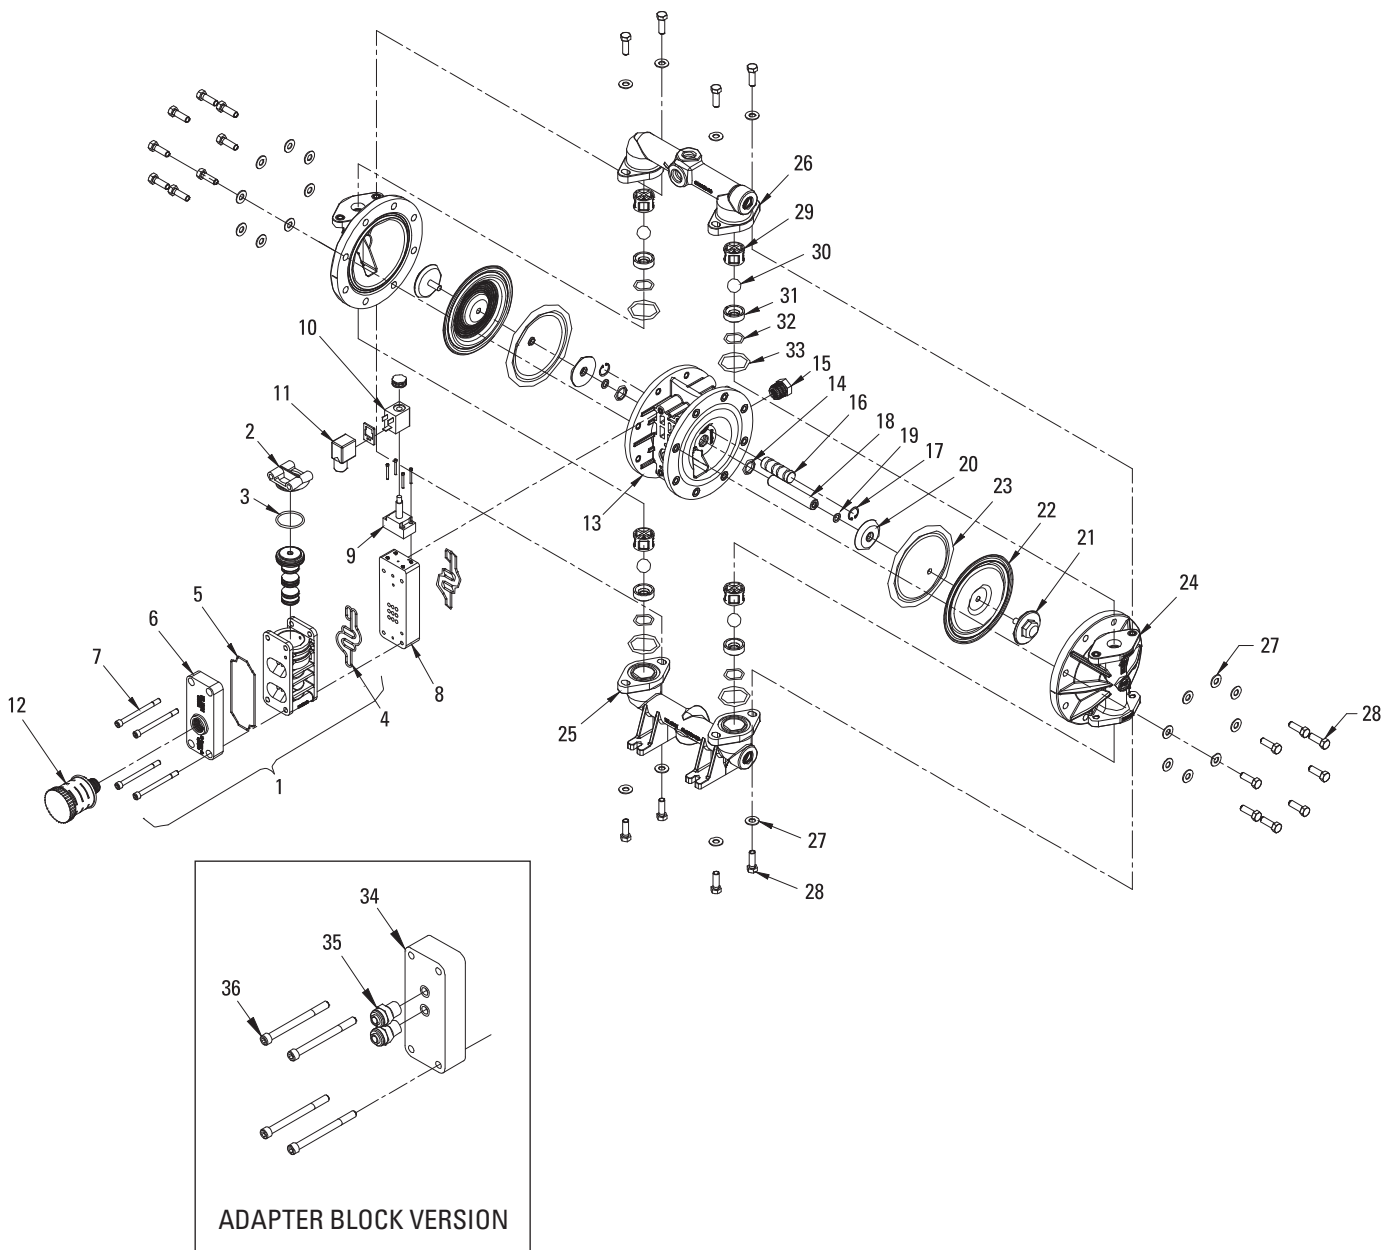

EXPLODED VIEW & PARTS LISTING

A100 PLASTIC

PTFE-FITTED

PARTS LISTING

Item	Description	Qty.	A100P/PKPPP/0151 P/N	A100P/KKPPP/0151 P/N
1	Air Valve Assembly ¹	1	01-2010-20	01-2010-20
2	End Cap	1	01-2332-20	01-2332-20
3	O-ring, (.103 x 1.362)	1	01-2395-52	01-2395-52
4	Gasket, Air Valve	2	01-2615-52	01-2615-52
5	Gasket, Muffler Plate	1	01-3505-52	01-3505-52
6	Muffler Plate	1	01-3181-20	01-3181-20
7	Air Valve Screws, SHC, 1/4-20 x 4.5	4	01-6000-03	01-6000-03
8	Solenoid Spacer Plate	1	01-2160-20	01-2160-20
9	Operator, Solenoid, Nema 4	1	00-2120-99	00-2120-99
10	Coil	1	00-2110-99-151	00-2110-99-151
11	Terminal Connector	1	00-2130-99	00-2130-99
12	Muffler, 1/2"	1	02-3510-99	02-3510-99
13	Center Section	1	01-3141-20	01-3141-20
14	Glyd-Ring II, (.618 x .136)	2	01-3220-55	01-3220-55
15	Reducer Bushing	1	01-6950-20	01-6950-20
16	Pilot Plug Assy	1	01-2285-99	01-2285-99
17	Retaining Ring	2	00-2650-03	00-2650-03
18	Shaft	1	01-3810-03	01-3810-03
19	Disc Spring (.331 x .512)	2	01-6802-08	01-6802-08
20	Piston, Inner, (Combo)	2	01-3711-08	01-3711-08
21	Piston, Outer, (Combo)	2	01-4570-21-500	01-4570-21-500
22	Diaphragm, Primary, PTFE	2	01-1010-55	01-1010-55
23	Diaphragm, Back-Up, Neoprene	2	01-1060-51	01-1060-51
24	Liquid Chamber	2	01-5005-20	01-5005-21
25	Inlet Manifold	1	01-5095-20	01-5095-21
26	Discharge Manifold	1	01-5035-20	01-5035-21
27	Washer (.343 x .750 x .05)	24	01-6732-03	01-6732-03
28	Screw, HHC, 5/16-18 x 1.13	24	01-6191-03	01-6191-03
29	Ball Cage	4	01-5355-20	01-5355-21
30	Valve Ball	4	01-1080-55	01-1080-55
31	Valve Seat	4	01-1125-20	01-1125-21
32	Valve Seat O-ring (.924 x .103)	4	01-1205-60	01-1205-60
33	Manifold O-ring (1.484 x .139)	4	05-1370-60	05-1370-60
34	Adapter Block	1	01-2155-20	01-2155-20
35	Adapter Block Air Fittings	2	00-2170-20	00-2170-20
36	Air Valve Screws, SHC, 1/4-20 x 2	4	04-6000-03	04-6000-03
	Alternate OEM Manifold (not shown)	1	01-5097-20	01-5097-21
	Drum Pump Manifold (not shown)	1	01-5094-20	01-5094-21
	Pipe Plug (not shown)	1	01-7101-20	01-7101-21

¹Air Valve Assembly includes items 2 & 3

All Boldface items are primary wear parts.

ELASTOMER OPTIONS

A100P & A100B PLASTIC

MATERIAL	DIAPHRAGMS	VALVE BALLS	VALVE SEATS	VALVE SEAT O-RINGS	MANIFOLD O-RINGS
Polyurethane	01-1010-50	01-1080-50	N/A	01-1200-50	02-1230-50
Buna-N	01-1010-52	01-1080-52	N/A	00-1260-52	02-1230-52
FKM	01-1010-53	01-1080-53	N/A	N/A	N/A
Wil-Flex™	01-1010-58	01-1080-58	N/A	00-1260-58	01-1370-58
Saniflex™	01-1010-56	01-1080-56	N/A	01-1200-56	01-1370-56
PTFE	01-1010-55	01-1080-55	N/A	N/A	N/A
PTFE with Integral Piston	01-1030-55	N/A	N/A	N/A	N/A
Encapsulated/FKM	N/A	N/A	N/A	01-1205-60	05-1370-60
PVDF	N/A	N/A	01-1125-21	N/A	N/A
Polypropylene	N/A	N/A	01-1125-20	N/A	N/A

COIL OPTIONS

Specialty Code	Part Number	Description
150	00-2110-99-150	24V DC
154	00-2110-99-154	24V DC, NEMA 7
157	00-2110-99-157	24V DC, International
151	00-2110-99-151	24V AC/12V DC
153	00-2110-99-153	24V AC/12V DC, NEMA 7
155	00-2110-99-155	110V AC
156	00-2110-99-156	110V AC, NEMA 7

ADAPTER BLOCK OPTIONS

Part Number	Description
01-2155-13	Acetal
01-2155-20	Polypropylene

OPERATOR OPTIONS

Part Number	Description
00-2120-99	Nema 4
00-2121-99	Nema 7

WARRANTY

Each and every product manufactured by Wilden Pump and Engineering, LLC is built to meet the highest standards of quality. Every pump is functionally tested to insure integrity of operation.

Wilden Pump and Engineering, LLC warrants that pumps, accessories and parts manufactured or supplied by it to be free from defects in material and workmanship for a period of five (5) years from date of installation or six (6) years from date of manufacture, whichever comes first. Failure due to normal wear, misapplication, or abuse is, of course, excluded from this warranty.

Since the use of Wilden pumps and parts is beyond our control, we cannot guarantee the suitability of any pump or part for a particular application and Wilden Pump and Engineering, LLC shall not be liable for any consequential damage or expense arising from the use or misuse of its products on any application. Responsibility is limited solely to replacement or repair of defective Wilden pumps and parts.

All decisions as to the cause of failure are the sole determination of Wilden Pump and Engineering, LLC.

Prior approval must be obtained from Wilden for return of any items for warranty consideration and must be accompanied by the appropriate MSDS for the product(s) involved. A Return Goods Tag, obtained from an authorized Wilden distributor, must be included with the items which must be shipped freight prepaid.

The foregoing warranty is exclusive and in lieu of all other warranties expressed or implied (whether written or oral) including all implied warranties of merchantability and fitness for any particular purpose. No distributor or other person is authorized to assume any liability or obligation for Wilden Pump and Engineering, LLC other than expressly provided herein.

PLEASE PRINT OR TYPE AND FAX TO WILDEN

PUMP INFORMATION				
Item # _____		Serial # _____		
Company Where Purchased _____				
YOUR INFORMATION				
Company Name _____				
Industry _____				
Name _____		Title _____		
Street Address _____				
City _____		State _____	Postal Code _____	Country _____
Telephone _____	Fax _____	E-mail _____	Web Address _____	
Number of pumps in facility? _____		Number of Wilden pumps? _____		
Types of pumps in facility (check all that apply): ☐ Diaphragm ☐ Centrifugal ☐ Gear ☐ Submersible ☐ Lobe				
☐ Other _____				
Media being pumped? _____				
How did you hear of Wilden Pump? ☐ Trade Journal ☐ Trade Show ☐ Internet/E-mail ☐ Distributor				
☐ Other _____				

ONCE COMPLETE, FAX TO (909) 783-3440

OR GO TO PSGDOVER.COM > WILDEN > SUPPORT TO COMPLETE THE WARRANTY REGISTRATION ONLINE

NOTE: WARRANTY VOID IF PAGE IS NOT FAXED TO WILDEN OR SUBMITTED ONLINE VIA THE PSGDOVER.COM WEBSITE

WILDEN PUMP & ENGINEERING, LLC

Where Innovation Flows



WILDEN[®]

PSG

22069 Van Buren St., Grand Terrace, CA 92313-5607

P: +1 (909) 422-1730 • F: +1 (909) 783-3440

wildenpump.com

PSG[®] reserves the right to modify the information and illustrations contained in this document without prior notice. This is a non-contractual document. 11-2018

Authorized PSG Representative:

Copyright ©2018, PSG[®], A Dover Company

WIL-11040-E-06
REPLACES WIL-11040-E-05