


E2 DATA SHEET

SPECIFICATIONS & PERFORMANCE

2" Elima-Matic Bolted Aluminum – ATEX with Metallic Center Section

PERFORMANCE

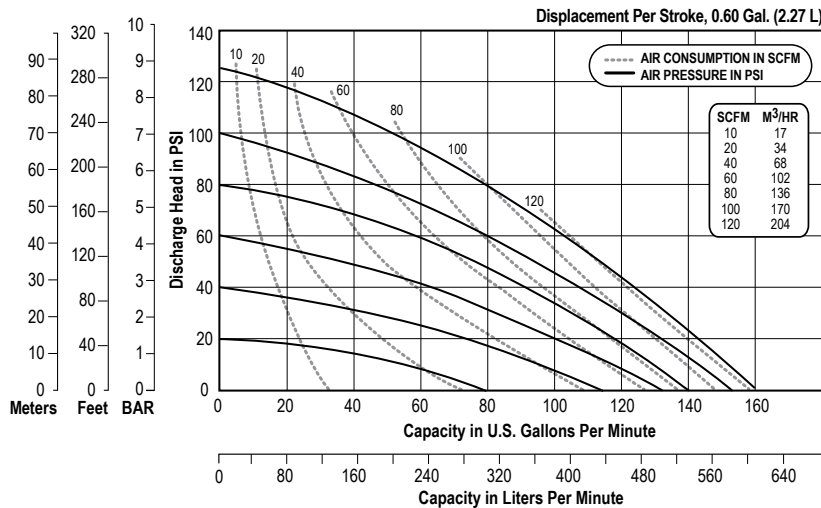

SPECIFICATIONS

Flow Rate

Adjustable to . . . 0-163 gpm (617 lpm)

Port Size

Suction 2" NPT

Discharge 2" NPT

Air Inlet 1/2" NPT

Air Exhaust 1" NPT

Suction Lift

Dry 18' (5.5 m)

Wet 32' (9.8 m)

Max Solid Size (Diameter)



. 7/16" (11.1 mm)

Max Noise Level 92 dB(A)

Shipping Weights

Aluminum 81 lbs (36.7 kg)

DIMENSIONS

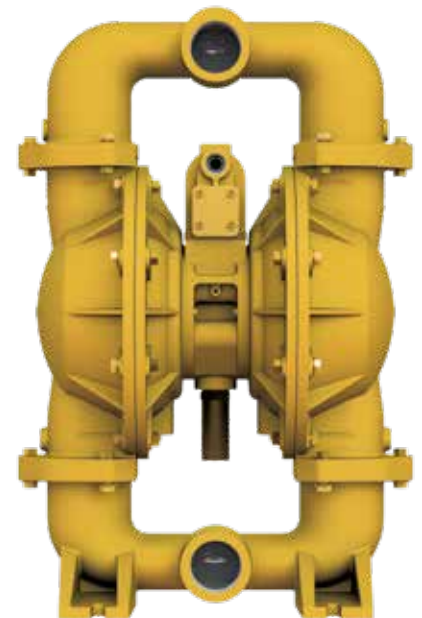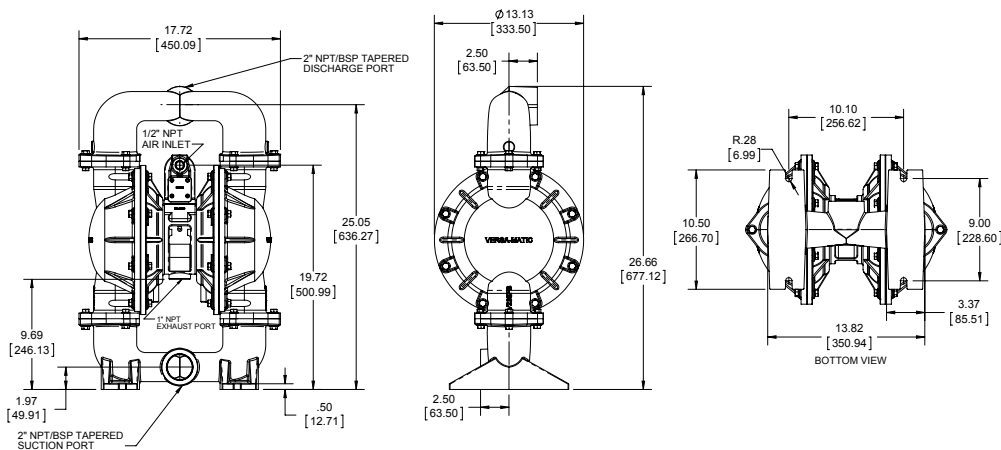

VERSAMATIC®

Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street | Mansfield, OH 44902 USA
Phone: 419.526.7296 | Fax: 419.526.7289

VERSAMATIC.COM

e2mdlCdsATEXAB-rev0519

©Copyright 2019 Warren Rupp, Inc. All Rights Reserved.